

Specifications

Eave height: 8.00m

Span width: 10.00m to 30.00m

Ridge height: Int. 8.46m, Ext 9.50m

Bay distance: 5.00m

Roof pitch: 7°

Number of gable uprights: 1 Gable upright (per end)

Longest component: 5.50m

Minimum length: 10.00m

Maximum length: Unlimited in 5.00m increments

Max allowed wind speed: 102 km/h (0.50kN/m<sup>2</sup>)




Main profile size: 300/122/4.7/8mm

Eave connection type: Internal galvanised steel insert

Aluminium type: European - Hard Pressed Extruded Structural Aluminium

Connecting components: European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type: Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

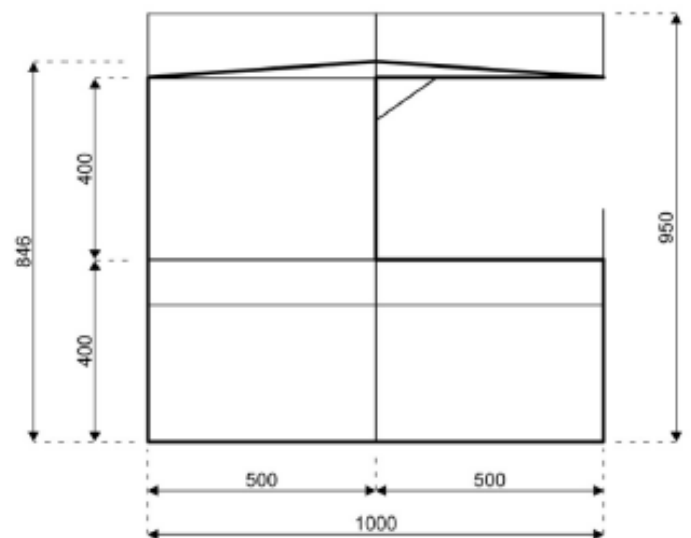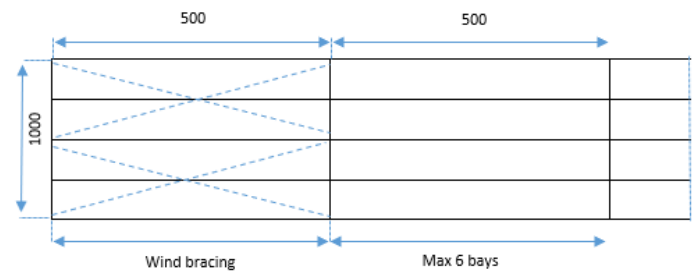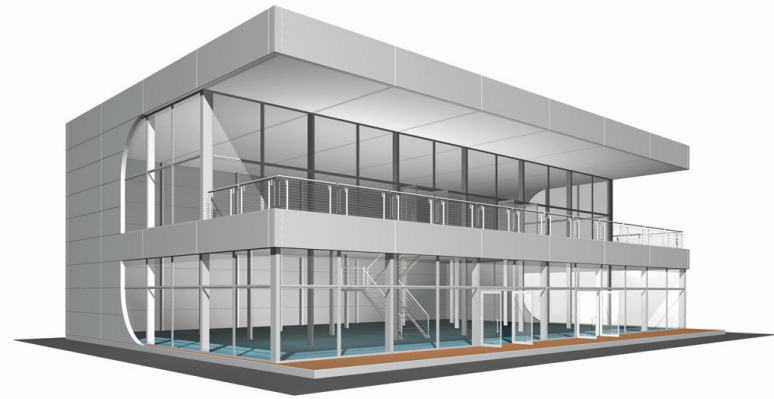

## ACCESSORIES

