

Specifications

Eave height: 3.50m to 4.40m
 Span width: 5.00m to 20.00m
 Ridge height: 4.17m
 Bay distance: 2.50m
 Roof pitch: 15°
 Longest component: 5.00m
 Minimum length: 7.50m
 Maximum length: Unlimited in 2.50m increments


Max allowed wind speed: 102 km/h
 (0.50kN/m²)

Main profile size: 170/88/3mm (4-channel)
 Eave connection type: Internal galvanised steel insert


Aluminium type: European - Hard Pressed Extruded Structural Aluminium

Connecting components: CE Certified - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type: Highly durable industrial grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438-7837; USA NFPA701

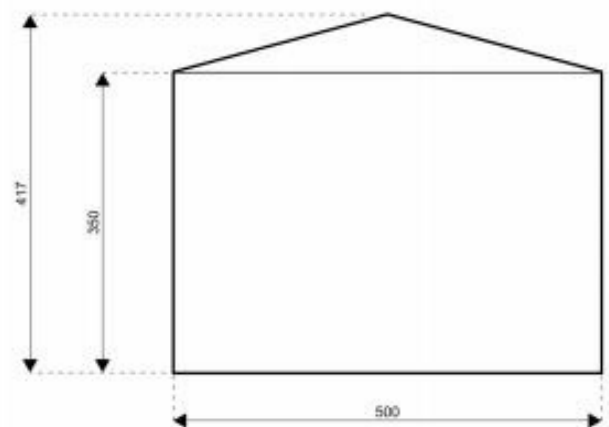

ACCESSORIES

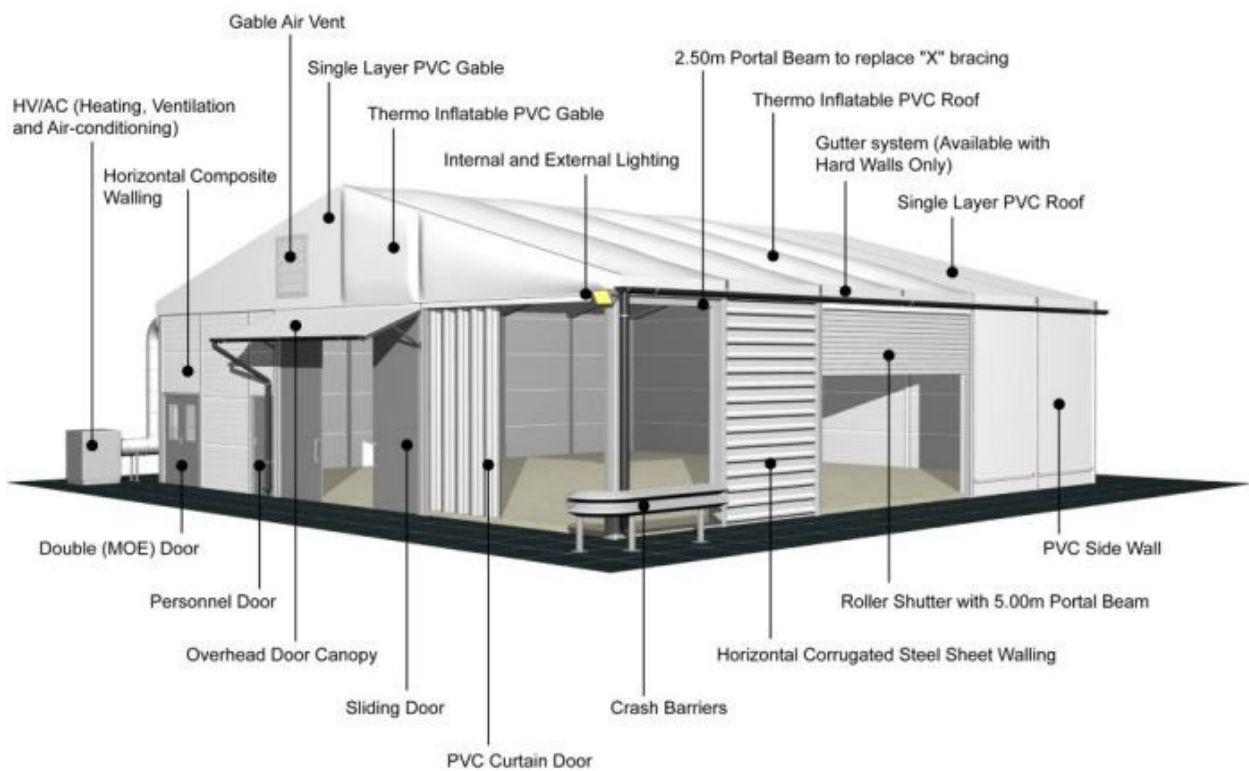

ACCESSORIES

