

Specifications

Eave height: 4.00m

Span width: 10.00m to 20.00m

Ridge height: 7.15m

Bay distance: 5.00m

Roof pitch: 0°

Number of gable uprights: 1 Gable upright (per end)

Longest component: 5.00m

Minimum length: 10.00m

Maximum length: 10.00m

Max allowed wind speed: 102 km/h (0.50kN/m²)




Main profile size: 334/122/8/4.5mm (4-channel)

Eave connection type: Galvanised steel twin plate

Aluminium type: European - Hard Pressed Extruded
Structural Aluminium

Connecting components: European - hot dipped,
structural grade corrosive resistant galvanised steel

Roof covering type: Premium grade, high gloss
white, PVC coated polyester fabric - UV resistant
and flame retardant according to: DIN 4102 B1, M2;
BS 5438/7837; USA NFPA701.

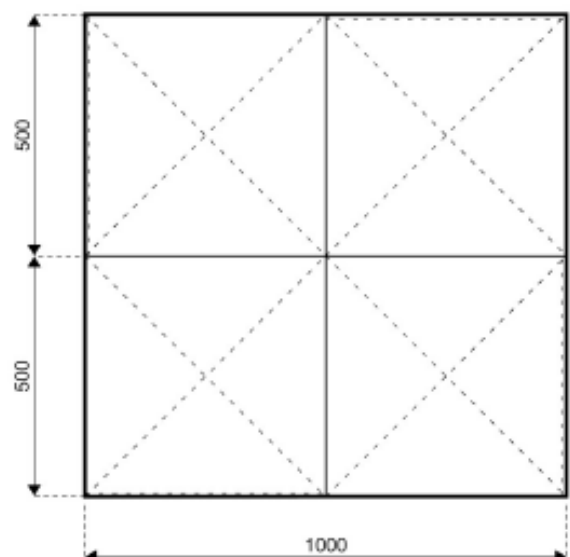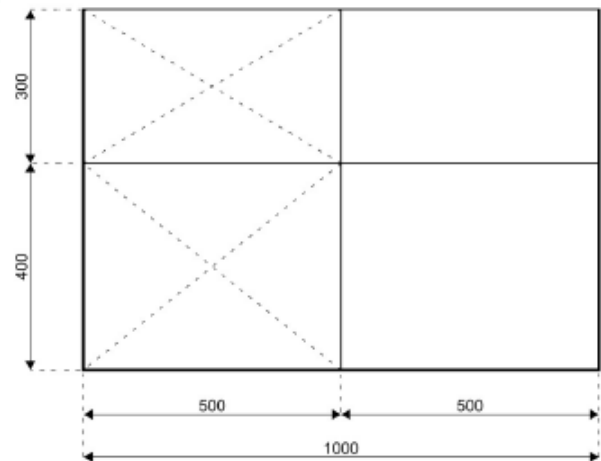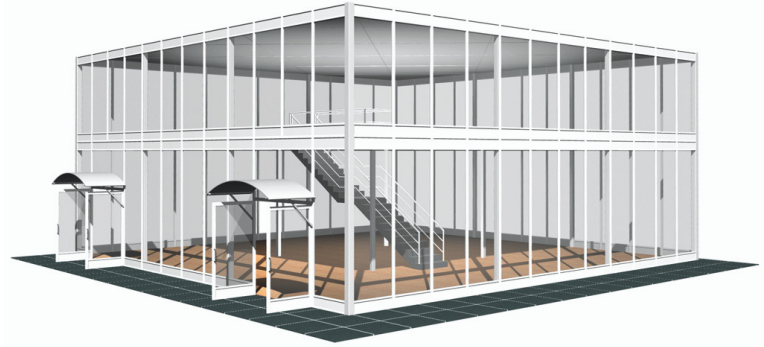

ACCESSORIES

