

Specifications

Eave height: 4.15m

Span width: 10.00m to 40.00m

Ridge height: N/A

Bay distance: 5.00m

Roof pitch: N/A

Number of gable uprights: 1 Gable upright
(per end)

Longest component: N/A

Minimum length: 10.00m

Maximum length: Unlimited in 5.00m
increments

Max allowed wind speed: 102 km/h
(0.50kN/m^2)




Main profile size: 288/123/9/4.5mm (4-
channel)

Eave connection type: Galvanised steel twin
plate

Aluminium type: European - Hard Pressed
Extruded Structural Aluminium

Connecting components: European - hot
dipped, structural grade corrosive resistant
galvanised steel

Roof covering type: Premium grade, high
gloss white, PVC coated polyester fabric -
UV resistant and flame retardant according
to: DIN 4102 B1, M2; BS 5438/7837; USA
NFPA701.

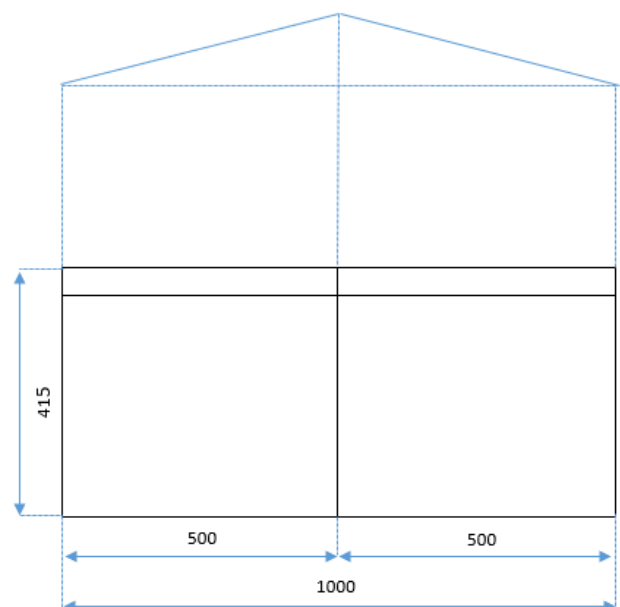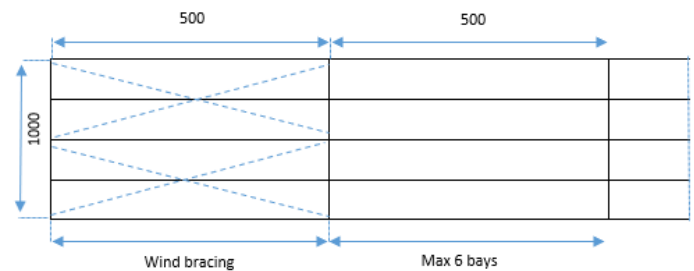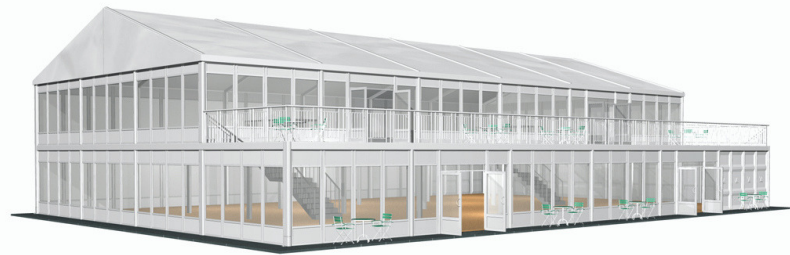

ACCESSORIES

