
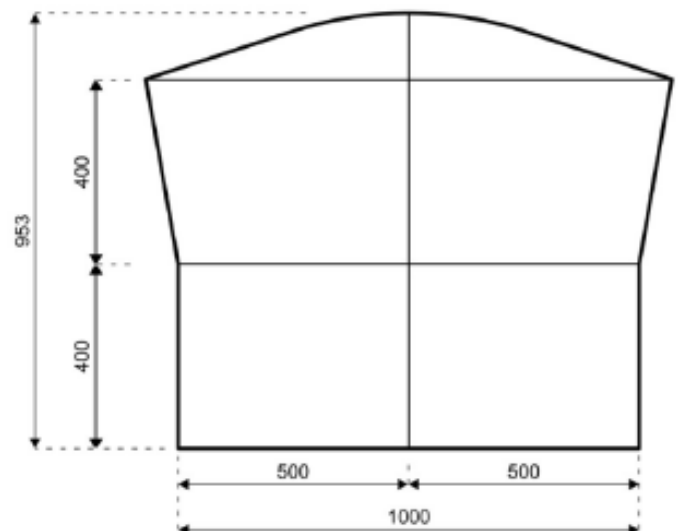
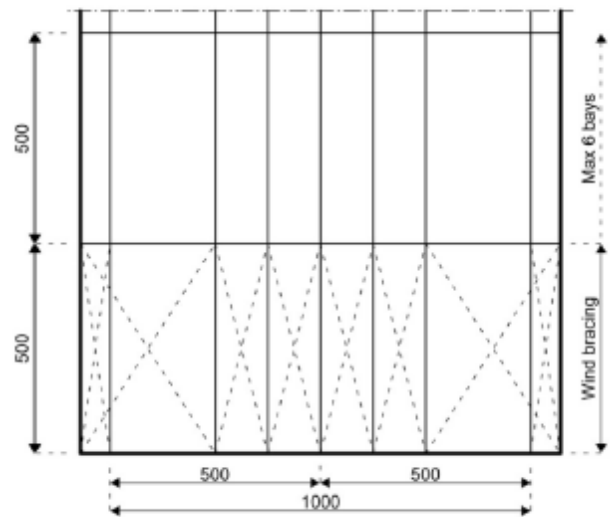


Specifications

Eave height: 4.00m per level to 8.00m
 Span width: 10.00m- 15.00m - 20.00m
 Ridge height: 9.53m
 Bay distance: 5.00m
 Roof pitch: 18°
 Number of gable uprights: 1 Gable upright (per end)
 Longest component: 6.45m
 Minimum length: 10.00m
 Maximum length: Unlimited in 5.00m increments
 Max allowed wind speed: 102 km/h (0.50kN/m²)

Main profile size: 300/122/5/8mm
 Eave connection type: Galvanised steel twin plate
 Aluminium type: European - Hard Pressed Extruded Structural Aluminium
 Connecting components: European - hot dipped, structural grade corrosive resistant galvanised steel
 Roof covering type: Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

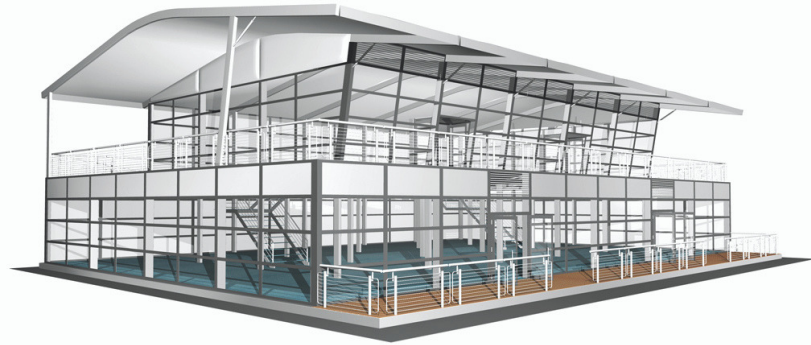

ACCESSORIES

