

Specifications

Eave height:

4.15m

Span width:

10.00m to 40.00m

Ridge height:

N/A

Bay distance:

5.00m

Roof pitch:

N/A

Number of gable uprights:

1 Gable upright (per end)

Longest component:

N/A

Minimum length:

10.00m

Maximum length:

Unlimited in 5.00m increments

Max allowed wind speed:

102 km/h (0.50kN/m²)

Main profile size:

288/123/9/4.5mm (4-channel)

Eave connection type:

Galvanised steel twin plate

Aluminium type:

European - Hard Pressed Extruded Structural



Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

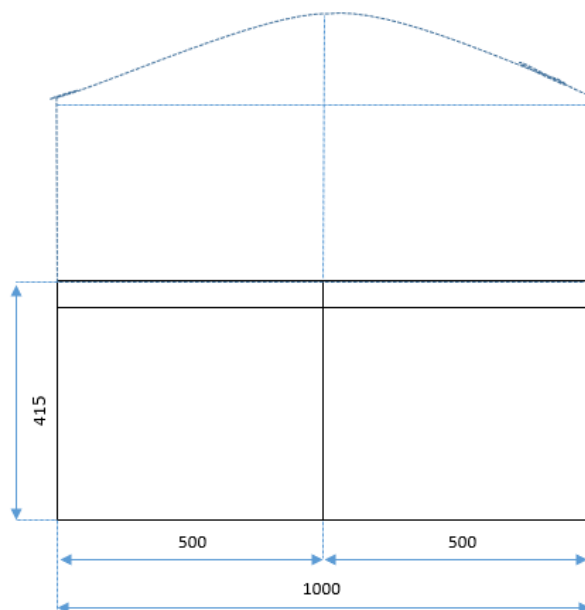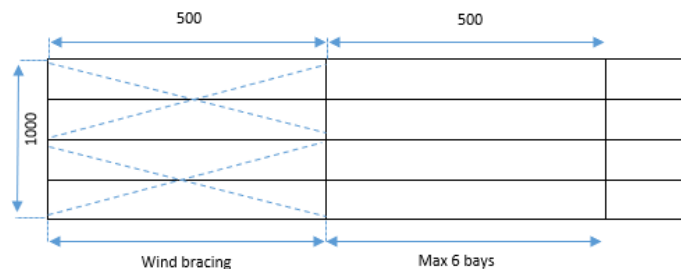

ACCESSORIES

