
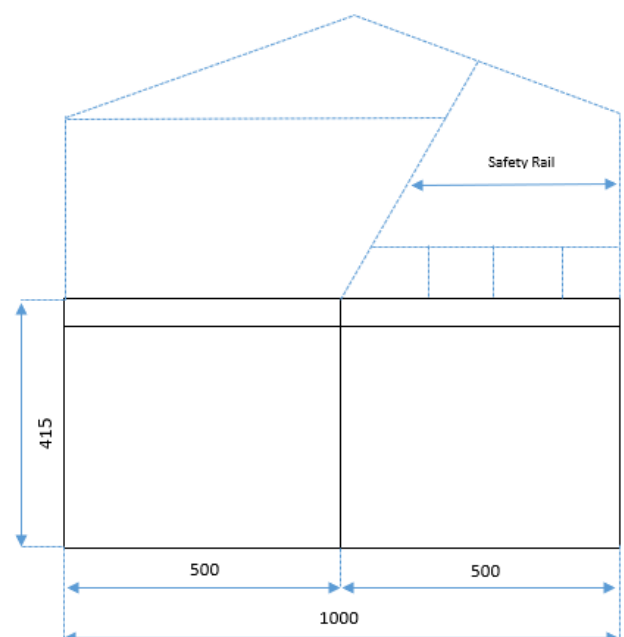


Specifications

Eave height: 4.15m
 Span width: 10.00m to 30.00m
 Ridge height: N/A
 Bay distance: 5.00m
 Roof pitch: N/A
 Number of gable uprights: 1 Gable upright (per end)
 Longest component: N/A
 Minimum length: 10.00m
 Maximum length: Unlimited in 5.00m increments
 Max allowed wind speed: 102 km/h (0.50kN/m²)

Main profile size: 288/123/9/4.5mm (4-channel)
 Eave connection type: Galvanised steel twin plate
 Aluminium type: European - Hard Pressed Extruded Structural Aluminium
 Connecting components: European - hot dipped, structural grade corrosive resistant galvanised steel
 Roof covering type: Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

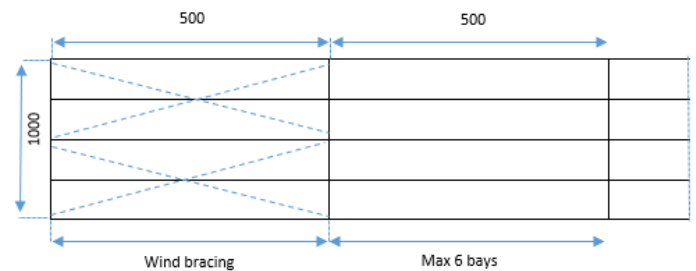

ACCESSORIES

