

Specifications

Eave height: 3.20m to 6.20m
 Span width: 5.00m to 30.00m
 Ridge height: 4.05m
 Bay distance: 5.00m
 Roof pitch: 18°

Longest component: 4.87m
 Minimum length: 10.00m
 Maximum length: Unlimited in 5.00m increments



Max allowed wind speed: Engineered to meet regional building code requirements according to BS6399 / Euro codes / IBC 2012
 Main profile size: 252/122/4mm (4-channel)

Eave connection type: Internal galvanised steel insert

Aluminium type: European - Hard Pressed Extruded Structural Aluminium

Connecting components: CE Certified - hot dipped, structural grade corrosive resistant galvanised steel

Roof covering type: Highly durable industrial grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701

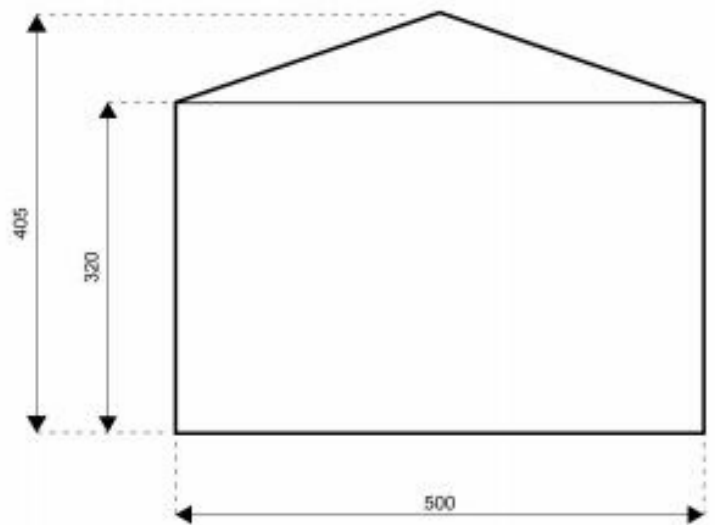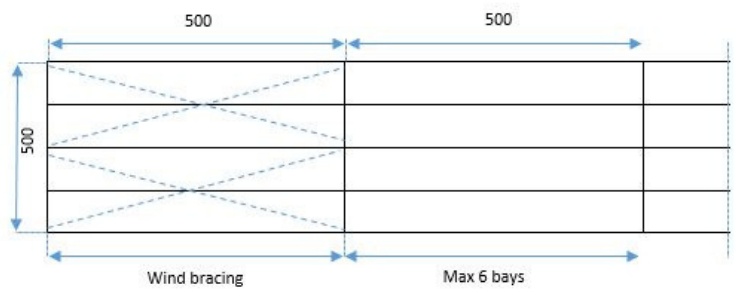

ACCESSORIES

